




TEST REPORT

According to ANSI/IES LM-80-15
For

Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China

Model: HL-A-3014H416W-S1-08HL-HR6

Report Type: 6000 Hours Test Report	Product Type: LED Package
Reviewed By: Pote Wang	<i>Pote Wang</i>
Report Number:	SZ2220725-33705E-EE-6000
Test Date:	2022-07-29 to 2023-04-05
Report Date:	2023-05-06
Approved by:	Blake Zhang / EE Engineer <i>Blake Zhang</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China. Tel: +86-755-33320018 Fax: +86-755-33320008
Test Facility:	Test facility was located at No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China.



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.(Shenzhen). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.



TABLE OF CONTENTS

1 - General Information	3
1.1 Description of LED Light Sources [#]	3
1.2 Standards and Reference Documentations.....	3
1.3 Testing Equipment.....	4
1.4 Drive Level.....	4
1.5 Ambient Conditions for Maintenance Test.....	4
1.6 Photometric Measurement Method and Uncertainty.....	4
1.7 Statement of Traceability.....	4
1.8 Sample Set.....	5
2 - Summary of Test Result	6
3 - Test Data	7
3.1 Data Set 1, 55°C, 30mA (Lumen Maintenance).....	7
3.2 Data Set 1, 55°C, 30mA (Forward Voltage).....	8
3.3 Data Set 1, 55°C, 30mA (Chromaticity Shift).....	9
3.4 Data Set 2, 85°C, 30mA (Lumen Maintenance).....	10
3.5 Data Set 2, 85°C, 30mA (Forward Voltage).....	11
3.6 Data Set 2, 85°C, 30mA (Chromaticity Shift).....	12
4 - DUT Photo	13
4.1 Mechanical Dimensions.....	13
4.2 DUT Photo.....	13
Directions	14

1 - General Information

1.1 Description of LED Light Sources[#]

Sample Size:

50 PCS test samples were in good condition and received on 2022-07-25. The samples were numbered from 1 to 25 and 26 to 50.

Manufacturer:	Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
Part Number:	HL-A-3014H416W-S1-08HL-HR6
Part Type:	LED Package
Drive Level:	DC 30mA
Nominal CCT:	2700K
Power:	0.102W
Average Current Density per LED die:	387.5mA/mm ²
Average Power Density per LED die:	1.318W/mm ²
CRI:	95
Die Spacing:	/

Sampling Method:

LED samples for IESNA LM-80 testing consist of units built from a minimum of three manufacturing lots with each manufacturing lot built from different wafer lots built on non-consecutive days.

These manufacturing lots are picked to represent a wide parametric distribution.

Family products covered by this report:

According to *ENERGY STAR[®] Requirements for the Use of LM-80 Data*, the following products can be covered by this report base on the information and declaration provided by manufacturer. The information of these models shows that the covered products meet all section 4 requirements of *ENERGY STAR[®] Requirements for the Use of LM-80 Data* (September 28, 2017)

This report covers the following models:

Series Name	Model Name	CRI (typ.)	Total Input Current (mA)	Power (W)	CCT (K)	Number of dies	Driver current per die (mA)	Current Density per Die (mA/mm ²)	Power Density per PCB (W/mm ²)	Die Spacing (mm)
Test model	HL-A-3014H416W-S1-08HL-HR6	95	30	0.102	2700	1	30	387.5	0.0476	/
Multiple model	HL-A-3014H***W-S1-08**HR* -***	>90	30	0.102	2700-6500	1	30	387.5	0.0476	/
	HL-A-3014H***W-S1-08**HR*(R9)-***	>90	30	0.102	2700-6500	1	30	387.5	0.0476	/
	HL-A-3014H***W-S1-08**HR* -***	>90	30	0.102	2700-6500	1	30	387.5	0.0476	/
	HL-A-3014D***W-S1-08**HR* -***	>90	30	0.102	2700-6500	1	30	387.5	0.0476	/

Note:

The model name begins with "HL", such as "HL-A-3014H***W-S1-08**HR* -***", " " is described in detail as follows:

- 1 - The first "****" is the number from 1 to 999 which stands for the brightness level.
- 2 - The second "***" is the letter HL or None which stands for the bonding wire style.
- 3 - The third "**" is the number 5 or 6 which stands for the CRI style
- 4 - The fourth "****" is the letter which stands for the customer code.

1.2 Standards and Reference Documentations

- ANSI/IES LM-80-15: IES Approved Method for Measuring Lumen Maintenance of LED Light Sources.
- *CIE 127:2007: Measurement of LEDs (This standard was not accredited by NVLAP)

- *ENERGY STAR® Requirements for the Use of LM-80 Data (This standard was not accredited by NVLAP)

1.3 Testing Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
0.5m integrating sphere	EVERFINE	AIS-2	G185304TA1381172	2022-11-18	2023-11-17
LED Test Source	EVERFINE	LTS-300	P185616CD1371113	2022-11-18	2023-11-17
High Accuracy Array Spectroradiometer	EVERFINE	HAAS-2000	P600674CM1381123	2022-06-07	2023-06-06
Standard Light Source	EVERFINE	D062	1011093	2021-10-15	2023-10-14
Multilayer aging machine	BACL	B2-270	20015	2022-10-19	2023-10-18
Program-controlled D.C. Stabilized Voltage Supply	Hanshenpuyuan	HSPY-60-03	N/A	2022-11-18	2023-11-17

1.4 Drive Level

Samples are driven with a constant direct current (DC) during maintenance test, photometric and electrical measurement. The current value was regulated to within $\pm 3\%$ of the specified value of the manufacturer during maintenance test, and was within $\pm 0.5\%$ during photometric and electrical measurement test.

1.5 Ambient Conditions for Maintenance Test

For lumen maintenance test, samples within one data set, were installed on cooling boards in thermal chambers with minimal ambient airflow. The case temperature and ambient temperature was monitored by thermocouples which one was soldered to the coldest DUTs' case (TMP_{LED}) location, while the other is mounted at a distance of 5 mm above the TMP location.

During life testing, TMP_{LED} of the coldest LEDs were maintained at a temperature that was greater than or equal to $2^{\circ}C$ below the corresponding nominal case temperature. Surrounding air was maintained at a temperature that was greater than or equal to $5^{\circ}C$ below the corresponding nominal case temperature. Thermocouples were shielded from direct DUT optical radiation and comply with ASTM E230 Table 1 "Special Limits".

Samples were connected to DC power supply in series circuits with a constant current. The forward current was regulated to within $\pm 3\%$ of the specified value of the manufacturer.

The relative humidity within chamber was kept less than 65% during test.

For photometry measurement, the ambient temperature during test was set to $25^{\circ}C \pm 2^{\circ}C$, RH <65%.

1.6 Photometric Measurement Method and Uncertainty

Integrating sphere and spectroradiometer is used to measure luminous flux and chromaticity coordinate $u'v'$. 2π measurement was used and sample was driven by DC power supply. The forward current was regulated to within $\pm 0.5\%$ of the nominal value. The test system was calibrated by halogen reference lamp. The ambient temperature during test was set to $25^{\circ}C \pm 2^{\circ}C$, RH <65%. The temperature measurement point was located in the sphere and the temperature was detected by a temperature probe.

The uncertainty of the light output measurements is $U=1.59\%$ ($K=2$), at the 95% confidence level. The uncertainty of the correlated color temperature measurements is $U=21K$ ($K=2$), at the 95% confidence level.

The uncertainty of the temperature is $U=0.8671^{\circ}C$ ($K=2$), at the 95% confidence level.

1.7 Statement of Traceability

Bay Area Compliance Laboratories Corp. (Shenzhen) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).



Bay Area Compliance Laboratories Corp. (Shenzhen)

5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial
Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China.
The NVLAP Lab Code is 200707-0

1.8 Sample Set

Data Set 1: 55°C, 30mA

Part Number: HL-A-3014H416W-S1-08HL-HR6
Number of Units: 25
Case Temperature: >53°C
Ambient Temperature: >50°C
Life Test Drive Current: 30mA
Measurement Current: 30mA

Data Set 2: 85°C, 30mA

Part Number: HL-A-3014H416W-S1-08HL-HR6
Number of Units: 25
Case Temperature: >83°C
Ambient Temperature: >80°C
Life Test Drive Current: 30mA
Measurement Current: 30mA

2 - Summary of Test Result

Data Set:	Sample Size	Failures Observed:	Test Interval	Test Duration	α	β	Reported TM-21 L ₇₀ Lifetime
1	25	0	1000hrs	6000hrs	1.981E-06	1.004	>36000 hours
2	25	0	1000hrs	6000hrs	2.111E-06	1.004	>36000 hours


Average Lumen Maintenance (Percentage of Initial Luminous Flux)

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	100.18%	99.97%	99.76%	99.57%	99.38%	99.19%
2	100.14%	99.95%	99.76%	99.54%	99.32%	99.09%

Average Chromaticity Shift

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	0.0001	0.0002	0.0003	0.0005	0.0007	0.0009
2	0.0001	0.0002	0.0004	0.0006	0.0008	0.0010

Average Lumen Maintenance and Chromaticity Shift VS. Time

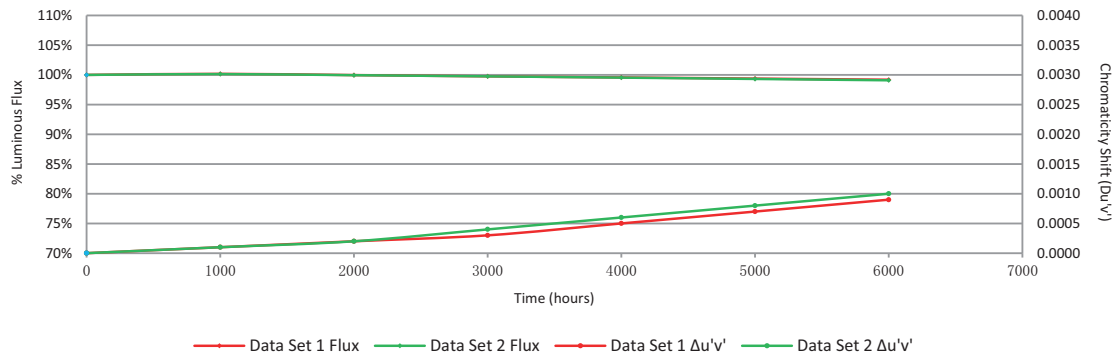



3 - Test Data

3.1 Data Set 1, 55°C, 30mA (Lumen Maintenance)

No.	Φ(lm)	Lumen Maintenance (%)					
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	9.732	100.21	99.90	99.75	99.57	99.47	99.28
2	9.767	100.22	100.02	99.92	99.75	99.62	99.51
3	9.676	100.27	100.19	99.87	99.76	99.67	99.51
4	9.840	100.32	100.11	99.91	99.66	99.40	99.24
5	9.794	100.30	100.13	99.99	99.71	99.58	99.39
6	9.484	100.27	99.98	99.79	99.53	99.33	99.19
7	9.425	100.33	100.07	99.78	99.55	99.30	99.01
8	9.716	100.19	99.86	99.77	99.61	99.41	99.10
9	9.733	100.15	99.82	99.65	99.55	99.29	98.97
10	9.692	100.03	99.87	99.75	99.58	99.47	99.37
11	9.538	100.04	99.85	99.67	99.49	99.36	99.27
12	9.560	100.20	100.02	99.80	99.54	99.30	99.18
13	9.754	100.21	100.03	99.85	99.57	99.29	99.10
14	9.826	100.20	99.84	99.65	99.39	99.11	98.84
15	9.742	100.32	100.10	99.76	99.52	99.27	99.16
16	9.568	100.11	100.03	99.81	99.70	99.60	99.39
17	9.521	100.36	100.20	99.89	99.66	99.47	99.34
18	9.746	100.19	100.01	99.87	99.70	99.44	99.20
19	9.738	100.11	99.95	99.66	99.47	99.31	99.08
20	9.571	100.06	99.98	99.79	99.50	99.31	99.13
21	9.739	100.02	99.75	99.57	99.41	99.25	99.02
22	9.841	100.02	99.85	99.49	99.26	99.12	98.96
23	9.776	100.05	99.91	99.54	99.48	99.21	99.02
24	9.433	100.11	99.85	99.73	99.62	99.37	99.12
25	9.613	100.10	99.92	99.80	99.62	99.52	99.30
Avg.	9.673	100.18	99.97	99.76	99.57	99.38	99.19
Med.	9.732	100.19	99.98	99.78	99.57	99.36	99.18
st dev	0.126	0.11	0.12	0.12	0.12	0.15	0.17
Min.	9.425	100.02	99.75	99.49	99.26	99.11	98.84
Max.	9.841	100.36	100.20	99.99	99.76	99.67	99.51



3.2 Data Set 1, 55°C, 30mA (Forward Voltage)

No.	Forward Voltage (V)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	2.913	2.919	2.915	2.916	2.919	2.906	2.914
2	2.919	2.915	2.922	2.918	2.900	2.923	2.900
3	2.916	2.934	2.919	2.917	2.907	2.914	2.916
4	2.913	2.911	2.914	2.901	2.916	2.906	2.914
5	2.909	2.919	2.909	2.902	2.927	2.908	2.912
6	2.904	2.913	2.905	2.902	2.900	2.929	2.902
7	2.906	2.924	2.907	2.916	2.913	2.925	2.913
8	2.909	2.916	2.909	2.908	2.906	2.919	2.911
9	2.906	2.917	2.907	2.904	2.900	2.918	2.910
10	2.910	2.914	2.912	2.916	2.918	2.919	2.912
11	2.905	2.909	2.906	2.904	2.917	2.909	2.919
12	2.919	2.918	2.921	2.905	2.908	2.903	2.919
13	2.906	2.921	2.909	2.915	2.900	2.900	2.918
14	2.912	2.922	2.915	2.911	2.901	2.918	2.905
15	2.922	2.925	2.926	2.903	2.908	2.922	2.902
16	2.907	2.911	2.911	2.910	2.902	2.904	2.907
17	2.903	2.905	2.905	2.912	2.906	2.917	2.906
18	2.909	2.912	2.912	2.906	2.900	2.901	2.914
19	2.915	2.921	2.921	2.906	2.904	2.908	2.914
20	2.910	2.913	2.914	2.913	2.909	2.910	2.911
21	2.911	2.919	2.912	2.906	2.906	2.917	2.907
22	2.911	2.916	2.912	2.918	2.909	2.901	2.914
23	2.909	2.911	2.911	2.901	2.908	2.902	2.902
24	2.918	2.918	2.923	2.906	2.928	2.911	2.911
25	2.915	2.913	2.919	2.904	2.928	2.914	2.909
Avg.	2.911	2.917	2.913	2.909	2.910	2.912	2.910
Med.	2.910	2.916	2.912	2.906	2.908	2.911	2.911
st dev	0.005	0.006	0.006	0.006	0.009	0.008	0.005
Min.	2.903	2.905	2.905	2.901	2.900	2.900	2.900
Max.	2.922	2.934	2.926	2.918	2.928	2.929	2.919

3.3 Data Set 1, 55°C, 30mA (Chromaticity Shift)

No.	u'	v'	CCT(K)	Chromaticity Shift ($\Delta u'v'$)					
				0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs
1	0.2591	0.5334	2745	0.0001	0.0002	0.0004	0.0005	0.0007	0.0009
2	0.2567	0.5292	2816	0.0001	0.0002	0.0004	0.0005	0.0008	0.0009
3	0.2585	0.5309	2768	0.0001	0.0002	0.0003	0.0005	0.0007	0.0008
4	0.2586	0.5332	2757	0.0002	0.0003	0.0003	0.0005	0.0006	0.0009
5	0.2577	0.5326	2778	0.0001	0.0002	0.0003	0.0005	0.0006	0.0009
6	0.2586	0.5310	2765	0.0001	0.0002	0.0002	0.0002	0.0004	0.0008
7	0.2594	0.5315	2747	0.0001	0.0002	0.0004	0.0005	0.0006	0.0009
8	0.2610	0.5332	2708	0.0001	0.0002	0.0003	0.0007	0.0007	0.0010
9	0.2591	0.5325	2750	0.0002	0.0003	0.0004	0.0005	0.0006	0.0009
10	0.2592	0.5314	2752	0.0001	0.0002	0.0003	0.0004	0.0005	0.0009
11	0.2620	0.5319	2693	0.0001	0.0002	0.0002	0.0004	0.0006	0.0009
12	0.2608	0.5315	2718	0.0001	0.0002	0.0002	0.0004	0.0006	0.0009
13	0.2572	0.5295	2803	0.0001	0.0002	0.0003	0.0004	0.0005	0.0008
14	0.2573	0.5322	2789	0.0001	0.0002	0.0004	0.0004	0.0007	0.0008
15	0.2574	0.5305	2794	0.0001	0.0002	0.0003	0.0004	0.0005	0.0008
16	0.2603	0.5302	2734	0.0001	0.0002	0.0003	0.0005	0.0006	0.0007
17	0.2566	0.5301	2813	0.0001	0.0002	0.0002	0.0004	0.0005	0.0005
18	0.2581	0.5329	2768	0.0001	0.0002	0.0002	0.0004	0.0005	0.0006
19	0.2596	0.5311	2745	0.0001	0.0002	0.0002	0.0004	0.0007	0.0009
20	0.2605	0.5329	2719	0.0001	0.0002	0.0003	0.0004	0.0008	0.0009
21	0.2594	0.5316	2746	0.0001	0.0002	0.0004	0.0004	0.0008	0.0011
22	0.2585	0.5313	2767	0.0002	0.0003	0.0004	0.0006	0.0009	0.0011
23	0.2581	0.5311	2776	0.0001	0.0002	0.0002	0.0004	0.0009	0.0012
24	0.2616	0.5312	2704	0.0001	0.0002	0.0002	0.0004	0.0009	0.0011
25	0.2587	0.5331	2755	0.0001	0.0002	0.0002	0.0007	0.0009	0.0012
Avg.	0.2590	0.5316	2756	0.0001	0.0002	0.0003	0.0005	0.0007	0.0009
Med.	0.2587	0.5315	2755	0.0001	0.0002	0.0003	0.0004	0.0006	0.0009
st dev	0.0015	0.0012	33	0.0000	0.0000	0.0001	0.0001	0.0001	0.0002
Min.	0.2566	0.5292	2693	0.0001	0.0002	0.0002	0.0002	0.0004	0.0005
Max.	0.2620	0.5334	2816	0.0002	0.0003	0.0004	0.0007	0.0009	0.0012



Bay Area Compliance Laboratories Corp. (Shenzhen)

5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial
 Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China.
 The NVLAP Lab Code is 200707-0

3.4 Data Set 2, 85°C, 30mA (Lumen Maintenance)

No.	Φ(lm)	Lumen Maintenance (%)					
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
26	9.525	100.25	100.08	99.93	99.64	99.41	99.20
27	9.764	100.18	99.97	99.76	99.59	99.37	99.18
28	9.743	100.10	99.78	99.60	99.24	99.07	98.80
29	9.729	99.95	99.87	99.72	99.48	99.23	98.94
30	9.678	100.25	99.98	99.60	99.26	99.06	98.82
31	9.686	100.27	100.03	99.86	99.74	99.64	99.45
32	9.724	100.10	99.77	99.59	99.30	99.16	98.97
33	9.605	99.96	99.86	99.74	99.70	99.43	99.30
34	9.558	99.96	99.90	99.82	99.67	99.48	99.15
35	9.705	100.33	100.06	99.79	99.42	99.17	98.90
36	9.535	100.21	100.02	99.66	99.42	99.26	99.02
37	9.792	100.12	100.06	99.87	99.72	99.41	99.26
38	9.795	100.29	100.02	99.64	99.51	99.13	98.89
39	9.611	100.24	100.03	99.76	99.40	99.02	98.92
40	9.636	100.22	99.91	99.64	99.46	99.28	99.06
41	9.503	100.29	99.98	99.74	99.64	99.40	99.06
42	9.899	100.17	99.87	99.75	99.40	99.28	99.02
43	9.690	100.10	99.92	99.81	99.68	99.57	99.25
44	9.669	100.09	100.01	99.74	99.56	99.31	99.14
45	9.570	100.07	100.03	99.94	99.79	99.54	99.40
46	9.611	99.89	99.76	99.69	99.57	99.51	99.21
47	9.693	100.11	100.04	99.88	99.63	99.38	99.08
48	9.753	100.02	99.97	99.76	99.59	99.26	99.11
49	9.511	99.93	99.98	99.86	99.50	99.23	98.90
50	9.599	100.27	99.96	99.77	99.60	99.39	99.08
Avg.	9.663	100.14	99.95	99.76	99.54	99.32	99.09
Med.	9.678	100.12	99.98	99.76	99.57	99.31	99.08
st dev	0.101	0.13	0.09	0.10	0.15	0.16	0.17
Min.	9.503	99.89	99.76	99.59	99.24	99.02	98.80
Max.	9.899	100.33	100.08	99.94	99.79	99.64	99.45



3.5 Data Set 2, 85°C, 30mA (Forward Voltage)

No.	Forward Voltage (V)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
26	2.910	2.919	2.913	2.902	2.914	2.919	2.903
27	2.916	2.929	2.921	2.916	2.917	2.917	2.912
28	2.915	2.915	2.919	2.931	2.915	2.919	2.936
29	2.912	2.928	2.917	2.918	2.914	2.911	2.928
30	2.905	2.915	2.908	2.917	2.910	2.905	2.917
31	2.907	2.919	2.912	2.901	2.916	2.917	2.912
32	2.919	2.924	2.924	2.915	2.920	2.930	2.914
33	2.913	2.917	2.916	2.910	2.915	2.913	2.916
34	2.906	2.910	2.910	2.911	2.909	2.904	2.904
35	2.934	2.940	2.939	2.927	2.910	2.902	2.914
36	2.912	2.923	2.916	2.919	2.921	2.914	2.912
37	2.933	2.938	2.937	2.929	2.906	2.927	2.900
38	2.933	2.936	2.937	2.914	2.919	2.921	2.918
39	2.910	2.914	2.914	2.907	2.908	2.914	2.918
40	2.916	2.920	2.920	2.926	2.918	2.921	2.919
41	2.913	2.917	2.919	2.932	2.904	2.911	2.918
42	2.922	2.921	2.921	2.910	2.912	2.913	2.917
43	2.920	2.919	2.920	2.917	2.901	2.918	2.907
44	2.909	2.912	2.910	2.918	2.913	2.910	2.931
45	2.922	2.924	2.924	2.922	2.926	2.925	2.919
46	2.922	2.923	2.923	2.924	2.922	2.915	2.926
47	2.916	2.917	2.919	2.906	2.919	2.919	2.937
48	2.919	2.917	2.919	2.916	2.907	2.912	2.917
49	2.912	2.912	2.913	2.919	2.906	2.930	2.914
50	2.918	2.919	2.921	2.930	2.908	2.928	2.919
Avg.	2.917	2.921	2.920	2.917	2.913	2.917	2.917
Med.	2.916	2.919	2.919	2.917	2.914	2.917	2.917
st dev	0.008	0.008	0.008	0.009	0.006	0.008	0.009
Min.	2.905	2.910	2.908	2.901	2.901	2.902	2.900
Max.	2.934	2.940	2.939	2.932	2.926	2.930	2.937




3.6 Data Set 2, 85°C, 30mA (Chromaticity Shift)

No.	u'	v'	CCT(K)	Chromaticity Shift ($\Delta u'v'$)					
				0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs
26	0.2603	0.5322	2726	0.0001	0.0002	0.0002	0.0005	0.0007	0.0010
27	0.2592	0.5331	2744	0.0001	0.0002	0.0007	0.0006	0.0006	0.0009
28	0.2598	0.5335	2731	0.0002	0.0003	0.0004	0.0007	0.0007	0.0008
29	0.2595	0.5329	2739	0.0001	0.0002	0.0004	0.0006	0.0008	0.0010
30	0.2610	0.5328	2709	0.0001	0.0002	0.0004	0.0006	0.0008	0.0010
31	0.2611	0.5331	2706	0.0001	0.0002	0.0004	0.0005	0.0007	0.0008
32	0.2601	0.5325	2728	0.0001	0.0002	0.0003	0.0005	0.0008	0.0009
33	0.2589	0.5328	2751	0.0001	0.0002	0.0003	0.0005	0.0006	0.0007
34	0.2599	0.5323	2734	0.0001	0.0002	0.0004	0.0006	0.0008	0.0009
35	0.2593	0.5335	2741	0.0001	0.0002	0.0003	0.0003	0.0005	0.0008
36	0.2593	0.5302	2755	0.0001	0.0002	0.0004	0.0004	0.0006	0.0009
37	0.2562	0.5315	2816	0.0001	0.0002	0.0002	0.0002	0.0005	0.0008
38	0.2586	0.5321	2762	0.0001	0.0002	0.0003	0.0003	0.0003	0.0008
39	0.2598	0.5314	2740	0.0001	0.0002	0.0003	0.0003	0.0003	0.0007
40	0.2581	0.5317	2774	0.0001	0.0002	0.0005	0.0006	0.0009	0.0009
41	0.2587	0.5309	2765	0.0001	0.0002	0.0004	0.0006	0.0007	0.0010
42	0.2577	0.5331	2777	0.0002	0.0003	0.0005	0.0006	0.0009	0.0011
43	0.2583	0.5321	2767	0.0002	0.0003	0.0005	0.0006	0.0007	0.0010
44	0.2589	0.5319	2756	0.0001	0.0002	0.0004	0.0005	0.0008	0.0011
45	0.2623	0.5315	2688	0.0001	0.0002	0.0004	0.0004	0.0008	0.0011
46	0.2617	0.5321	2697	0.0001	0.0002	0.0004	0.0007	0.0010	0.0014
47	0.2590	0.5331	2750	0.0001	0.0002	0.0004	0.0008	0.0010	0.0012
48	0.2579	0.5331	2771	0.0001	0.0002	0.0003	0.0008	0.0011	0.0012
49	0.2613	0.5321	2705	0.0001	0.0002	0.0004	0.0008	0.0012	0.0012
50	0.2618	0.5323	2696	0.0002	0.0003	0.0005	0.0009	0.0014	0.0016
Avg.	0.2595	0.5323	2741	0.0001	0.0002	0.0004	0.0006	0.0008	0.0010
Med.	0.2593	0.5323	2741	0.0001	0.0002	0.0004	0.0006	0.0008	0.0010
st dev	0.0014	0.0008	30	0.0000	0.0000	0.0001	0.0002	0.0002	0.0002
Min.	0.2562	0.5302	2688	0.0001	0.0002	0.0002	0.0002	0.0003	0.0007
Max.	0.2623	0.5335	2816	0.0002	0.0003	0.0007	0.0009	0.0014	0.0016


4 - DUT Photo

4.1 Mechanical Dimensions

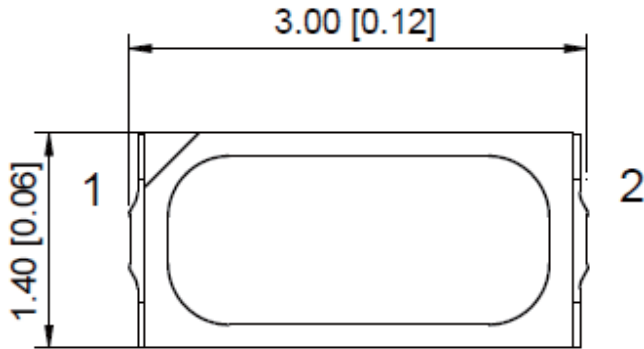

All dimensions are in millimeter

4.2 DUT Photo

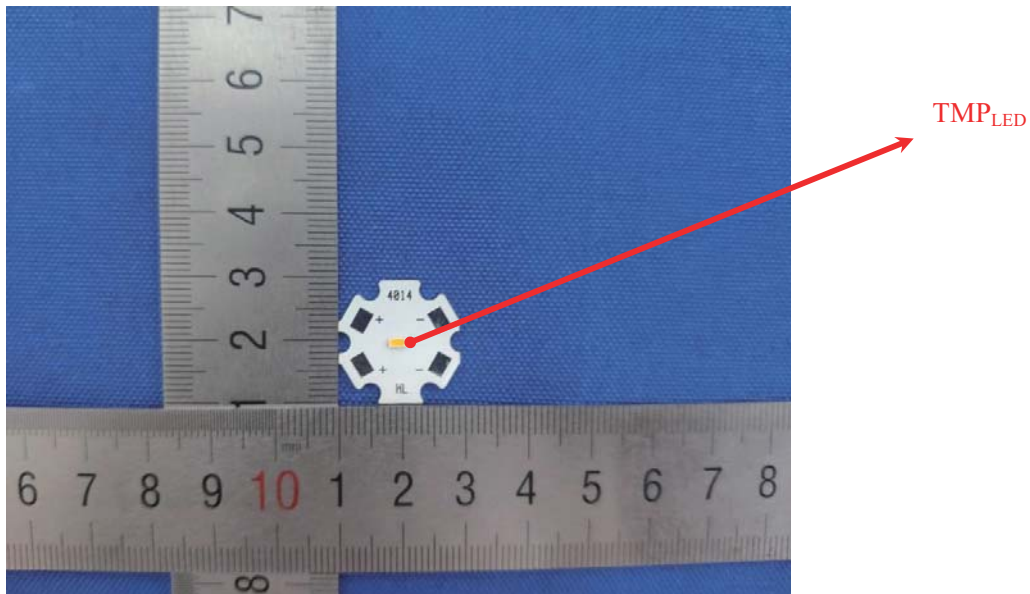



Bay Area Compliance Laboratories Corp. (Shenzhen)

5/F(B-West) -7/F, the 3rd Phase of Wan Li Industrial
Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China.
The NVLAP Lab Code is 200707-0

Directions

1. The information marked "superscript #" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. This report includes some test methods are not in NVLAP accreditation scope marked *.
3. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $K=2$ with the 95% confidence interval.
6. This report cannot be reproduced except in full, without prior written approval of the Company.
7. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

*****END OF REPORT*****